

World's smallest maritime VSAT

# TracPhone® V3IP

## Small antenna, big performance

The ultra-compact TracPhone V3IP provides always-on broadband data connections, an integrated voice line, worldwide coverage from the mini-VSAT Broadband network, and dramatically reduced airtime costs.

- 1 Ultra-high efficiency antenna using KVH's RingFire™ design and groundbreaking dielectric rod feed ensures excellent Ku-band reception even in bad weather
- 2 Advanced antenna controller for high-speed tracking
- 3 Dynamic, gyro-stabilized system seeks the optimum satellite within the mini-VSAT Broadband network and tracks it through the full dynamic motion experienced by commercial vessels



All VIP-series products include KVH's new **Integrated CommBox Modem** with IP-enabled antenna control unit, CommBox™ Network Manager, ArcLight® spread spectrum modem, Voice over IP, Ethernet switch, and Wi-Fi capabilities. Systems also feature a browser-based user interface and convenient iPhone® app for system status, updates, and support.

## System Specifications

Service	
Network	mini-VSAT Broadband
Antenna Type	Ku-band
Service Coverage Area	Seamless Worldwide Regions
Maximum Speed Download/Upload <sup>1</sup>	2 Mbps/128 Kbps
Abovedecks Equipment	
Antenna Dish Diameter	36.8 cm (14.5")
Antenna Unit Dimensions/Weight	39.4 cm D x 44.7 cm h (15.5" D x 17.6" h) / 11.3 kg (25 lbs)
Elevation/Azimuth Range	7.5° to 75° / 720° rotation
Temperature	Operating: -25°C to 55°C (-13°F to 131°F); Survival: -35°C to 70°C (-31°F to 158°F)
Humidity	IEC 60945; 40°C (104°F), 95% Humidity (non-condensing)
Rain	Precipitation rate of 100L/min, w/wind speeds up to 100 knots
Antenna Unit Power	DC; provided by ICM
ICM to Antenna Unit Communications	14 Conductor Data Cable
L-band RF Cables (customer supplied)	For 5-15 m (16-49 ft.) choose RG-11 For >16-30 m (49- 98 ft.) choose LMR-400-75 For >31-45 m (98-148 ft.) choose LMR-600-75
Belowdecks Equipment – Integrated CommBox Modem (ICM)	
Dimensions	42.6 cm (l) x 41.4 cm (w) x 2U (h) (16.8" x 16.3" x 2U) rack-mountable with optional mounting provisions <sup>2</sup>
Weight	5.1 kg (11.25 lbs)
Temperature	Operating: -15°C to 55°C (5°F to 131°F); Survival: -15°C to 70°C (5°F to 158°F)
Input Power	100-240 VAC, 50-60 Hz auto switching, 1.6 A max
Data Interfaces	4 Ethernet: IEEE 802.3 10BASE-T/100BASE-TX, 100 Mbps; 1 Wi-Fi 802.11; 3 USB ports
Voice Interfaces	1 RJ11 port for VoIP services
System Options	
CommBox Software Bundles Available	Standard or Enterprise Packages - see "Featured Options" at kvh.com/V3IP for details
Iridium Pilot Secondary System	Available as standalone system (P/N: 72-0537-01) or V3IP/Iridium Pilot System Bundle w/least cost routing (P/N: 01-0357-01); see "Featured Options" at kvh.com/V3IP for details
IP-MobileCast™ Services	Coming soon; contact KVH for details
UCH-250 Fax Server	For enterprise-grade faxing over IP (P/N 19-0520); contact KVH for details
GlobalCare Premium Support Program	Available; see kvh.com/globalcare for details
Complete System	
Certification	Complies with the specifications of EC directive 1999/5/EC Radio & Telecommunications Terminal Equipment (R&TTE), per compliance with EC directive 2006/95/EC, EMC directive 2004/108/EC and IEC 301-427
System Warranty <sup>3</sup>	Comprehensive 2-year parts, 1-year labor warranty supported by KVH's worldwide Certified Support Network (CSN)
Part Number / MSRP (USD)	01-0335-11 / \$16,995

Meets FCC and CE requirements. Exceeds Inmarsat operational, survival, and shock specifications.

<sup>1</sup>Published data speeds are maximum speeds and may vary in different regions and under different conditions.


<sup>2</sup>Optional Belowdecks Mounting Case (KVH Part No. 72-0368) available for vessels without a rack.

<sup>3</sup>Unless subject to in-country regulations. Restrictions apply. Visit [www.kvh.com/warranty](http://www.kvh.com/warranty) for details.

## System Diagram



**Integrated CommBox Modem (ICM)** – Streamlined belowdecks unit includes: IP-enabled antenna control unit, built-in CommBox Ship/Shore Network Manager, ArcLight spread spectrum modem, Voice over IP (VoIP), Ethernet switch, and Wi-Fi capabilities.

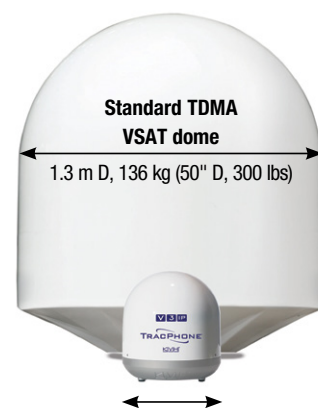

**TracPhone V3IP**  
39.4 cm D, 11.3 kg (15.5" D, 25 lbs)

95% smaller in volume than standard TDMA VSAT antennas and the world's smallest maritime VSAT, TracPhone V3IP is easier and less expensive to install.



## mini-VSAT Broadband Ku-band Coverage

The TracPhone V3IP is a 2-axis, stabilized antenna that does not provide coverage in areas where the satellite is directly overhead as shown in the hatched areas above. KVH offers a TracPhone V3IP/Iridium Pilot system bundle that offers pole-to-pole global coverage.

The map depicts KVH's expectations for mini-VSAT Broadband's coverage; actual coverage and availability may vary. Data rates may also vary in different regions. Go to [www.kvh.com/minivsatmap](http://www.kvh.com/minivsatmap) to view our coverage map and for complete details. KVH provides no guarantees of satellite coverage or availability.



**KVH Industries A/S**  
EMEA Headquarters  
Kokkedal, Denmark  
Tel: +45.45.160.180 Fax: +45.45.160.181  
E-mail: [info@emea.kvh.com](mailto:info@emea.kvh.com)

**KVH Industries, Inc.**  
World Headquarters  
Middletown, RI U.S.A.  
Tel: +1.401.847.3327 Fax: +1.401.849.0045  
E-mail: [info@kvh.com](mailto:info@kvh.com)

**KVH Industries Pte Ltd.**  
Asia-Pacific Headquarters  
Singapore  
Tel: +65.6513.0290 Fax: +65.6472.3469  
E-mail: [info@apac.kvh.com](mailto:info@apac.kvh.com)