




Technical Specifications

Time Control Unit with Pick-up Delay, 12V


Part No. 3087-12V

Please retain for future reference

Rated Voltage	12V
Operating Voltage	9V ... 16V
Max. Switching Current	Contact opened: □ 10A Contact closed: □ 20A / 30 min
Specifications	Plastic housing with flat pins according to DIN ISO 7588-2 C Flat pins according to DIN ISO 8092-1 6.3x0.8
Materials	Housing/ bottom plate: PAG GF 30 black Flat pins: brass/ tinned
Operating Temperature	-25°C ... + 80°C
Degree of Protection	Housing: □ IP50 according DIN 40050-9 Contacts: □ P20 according DIN 40050-9 when used in plug socket holder
Compatibility	Immunity and emission according: EN 13309 and ISO 13766; CD 95/54/EG; ISO/TR 10605; ISO 7637-1




S1	S1	t(s)
off	off	110...900
on	on	14...110
on	off	2,5...14
off	on	0...2,5

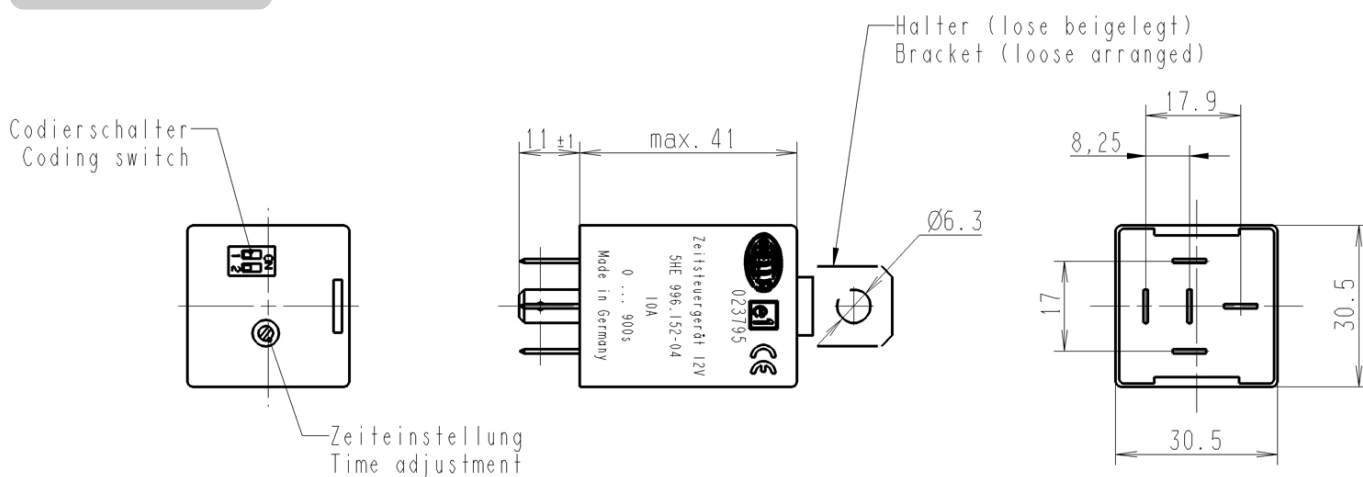

Funktionsdiagramm / action chart

Voreinstellung auf / pre-adjustment to
5s ± 10%

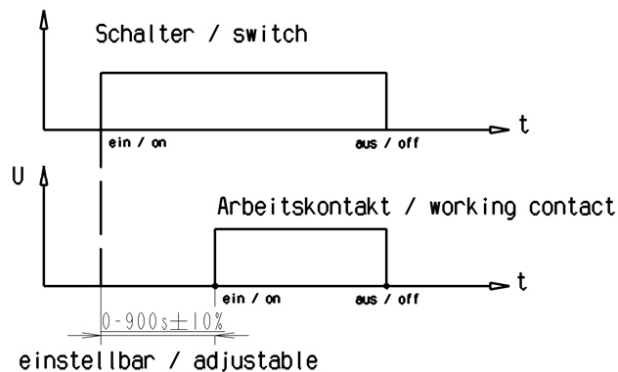

Anschlußplan / connecting plan

