


HYDRAULIC LINEAR DRIVES FOR SAILING BOATS EQUIPPED WITH MECHANICAL STEERING

INTERNAL INSTALLATION

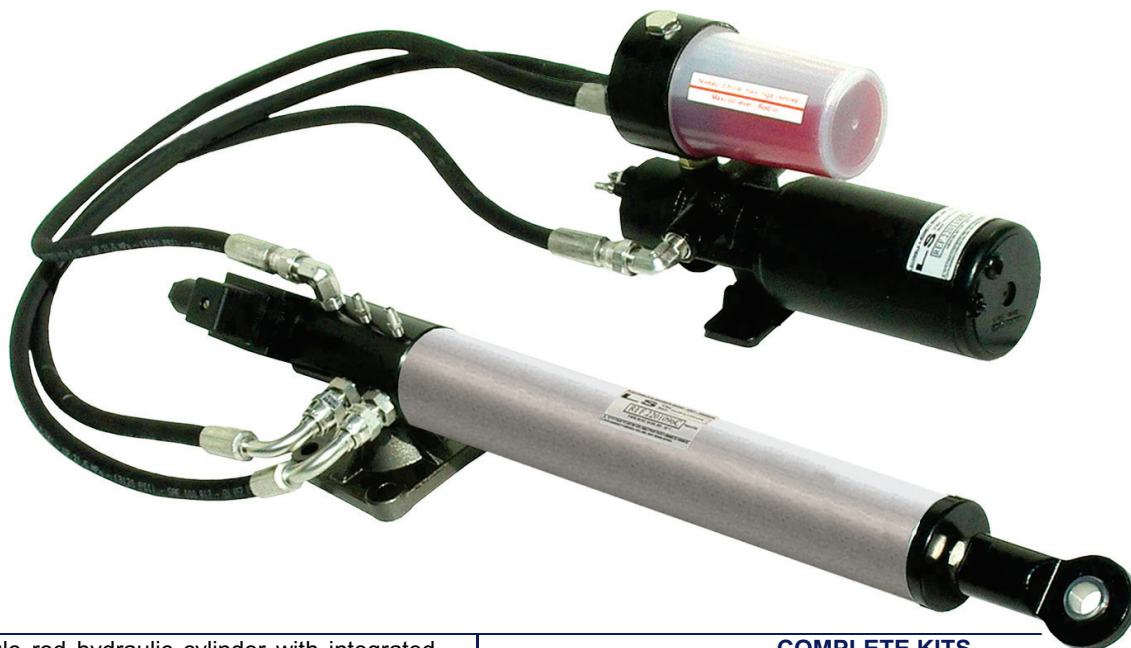


- Single rod hydraulic cylinder with integrated electrical by-pass.
- Compact overall dimensions for installation on virtually all types of boats.
- Directly fitted on the quadrant.
- Speed adjustment on the reversible power pack.
- Separate reversible power pack for installation at your selected location.
- The kit is supplied assembled and bled with 1.20 metre flexible tube*.
- All fittings in stainless steel.

COMPLETE KITS

2201786	Linear drive 32 ST 16 DE BP 12 V RI
2201787	Linear drive 32 ST 16 DE BP 24 V RI
2201788	Linear drive 40 ST 16 DE BP 12 V RI
2201789	Linear drive 40 ST 16 DE BP 24 V RI
2201790	Linear drive 50 ST 20 DE BP 12 V RI
2201791	Linear drive 50 ST 20 DE BP 24 V RI
2201792	Linear drive 50 ST 203 DE BP 12 V RI
2201793	Linear drive 50 ST 203 DE BP 24 V RI


* Other lengths on request.

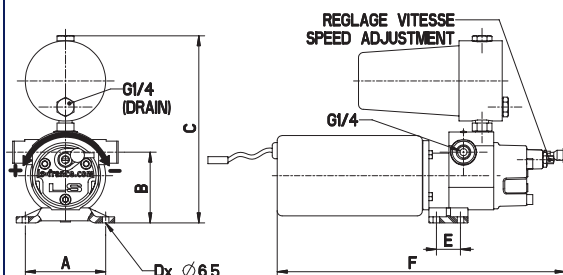

2201186 RV1 – ST – 12 V
2201100 RV2 – ST – 12 V
2201160 RV3 – ST – 12 V

2201187 RV1 – ST – 24 V
2201101 RV2 – ST – 24 V
2201161 RV3 – ST – 24 V

	A	B	C	D	E	F
RV1 ST	80	70	186	4	24	290
RV2 ST	3 5/32	2 3/4	7 21/64	4	15/16	11 27/64
RV3 ST	100	88	204	2	0	330
	3 15/16	3 15/32	8 1/32	2	0	13

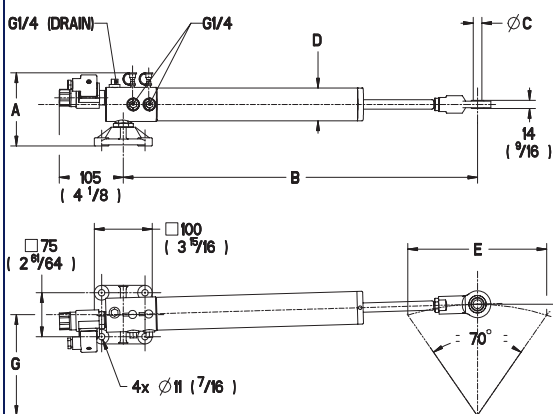

TYPE	VHM 32ST16 DEBP	VHM 40ST16 DEBP	VHM 50ST20 DEBP
Code 12V	2201371	2201096	2201098
Code 24V	2201372	2201097	2201099
Maximum thrust	280 kg 617 lbs	450 kg 992 lbs	700 kg 1543 lbs
Weight	3,5 kg 7.71 lbs	3,5 kg 7.71 lbs	5 kg 11 lbs
A	120 mm 4 23/32"	120 mm 4 23/32"	130 mm 5 1/8"
B	563 mm 22 11/64"	613 mm 24 1/8"	715 mm 28 9/64"
C	15 mm 19/32"	15 mm 19/32"	17 mm 43/64"
D	46 mm 1 13/16"	56 mm 2 55/64"	70 mm 2 3/4"
E	210 mm 8 17/64"	240 mm 9 7/16"	300 mm 11 13/16"
F	170 mm 6 11/16"	190 mm 7 31/64"	240 mm 9 29/64"
G	160 mm 6 19/64"	172 mm 6 61/64"	218 mm 8 37/64"