




INSTALLATION OF THE LAGOON 400 SQUARETOP MAINSAIL

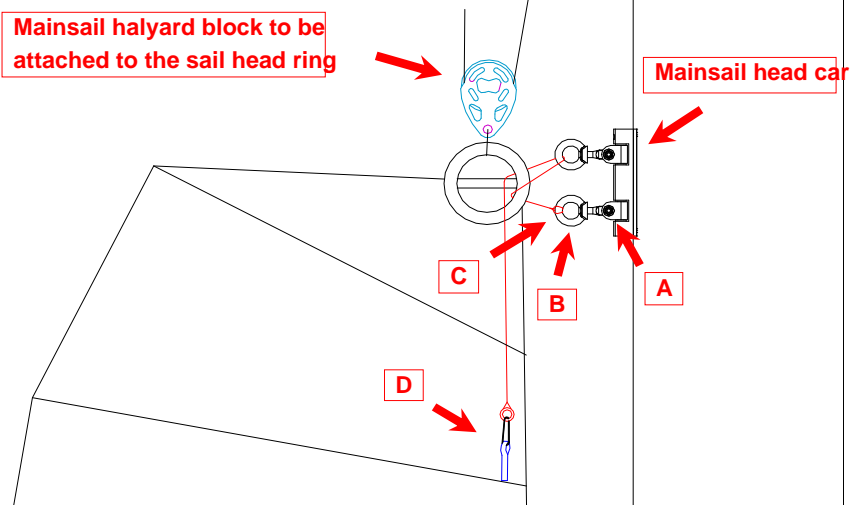

INSTRUCTIONS

1. Remove the lower ring assembly from the mainsail head car lower toggle (Screw A)
2. Unscrew the eye ring from the threaded pin ((B)
2. Create a 3:1 tackle for the squaretop with the tackle line by following the diagram.
3. Deadend the squaretop tackle line in the eyering. (C)
4. Rescrew the eye ring onto the threaded pin. (B)
5. Reinstall the lower ring assembly into the mainsail headcar lower toggle (Screw A)

Warning : The length of the squaretop head tackle line is predetermined by the sailmaker for a new sail installation. The lashing (D) will allow adjustment of the tackle line length as the sail stretches with age and use.