

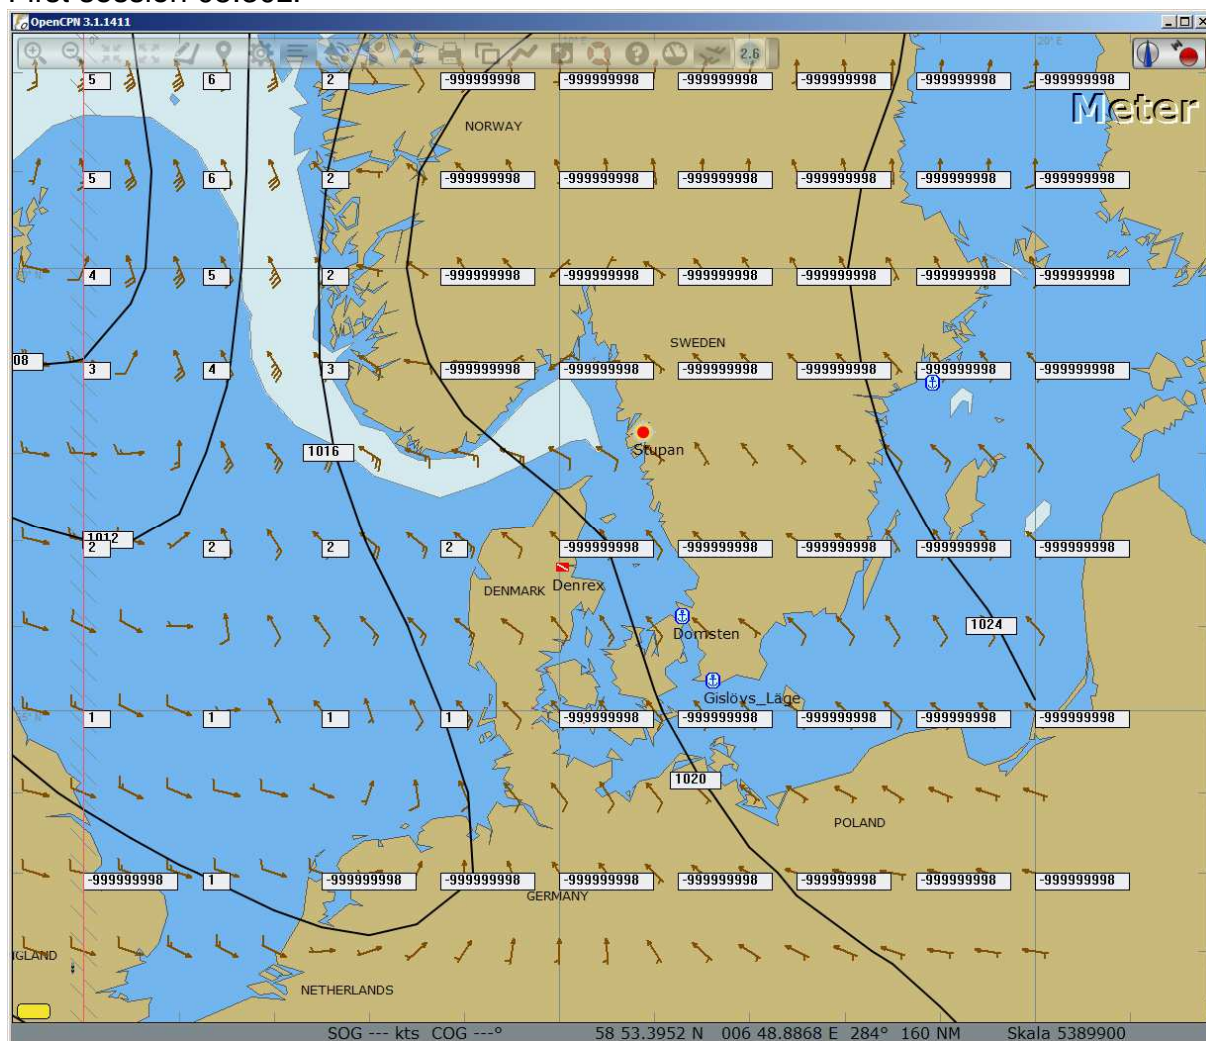


Two session captured. With and without corrupt zero waves. All preferences captured below.

First session 08:30z.

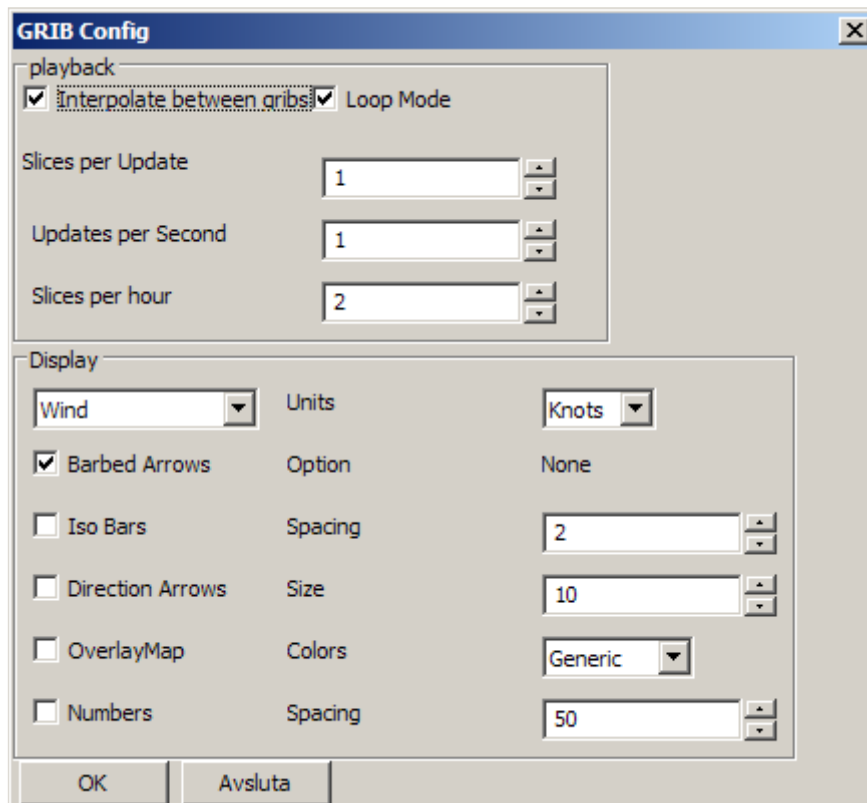

Pointer hovering over a zero wave area – field is empty

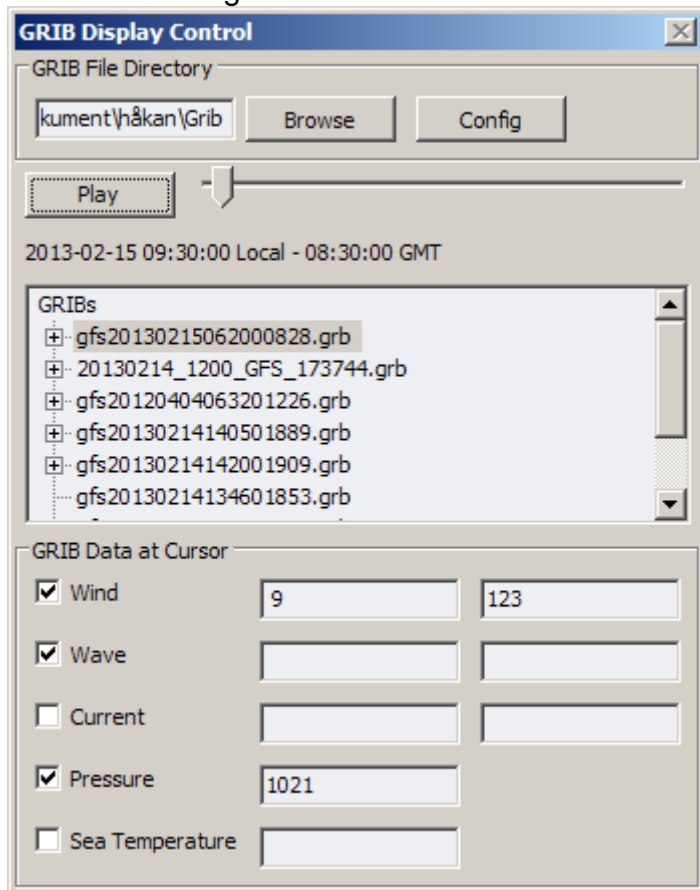

GRIB Config [X]

playback

☒ Interpolate between grib ☒ Loop Mode

Slices per Update

Updates per Second

Slices per hour

Display

Pressure Units **MilliBar**

☐ Barbed Arrows Option None

☒ Iso Bars Spacing

☐ Direction Arrows Size

☐ OverlayMap Colors **Generic**

☐ Numbers Spacing

OK Avsluta

GRIB Config [X]

playback

☒ Interpolate between grib ☒ Loop Mode

Slices per Update

Updates per Second

Slices per hour

Display

Wave Units **Meter**

☐ Barbed Arrows Option None

☐ Iso Bars Spacing

☒ Direction Arrows Size

☐ OverlayMap Colors **Generic**

☒ Numbers Spacing

OK Avsluta

GRIB Config [X]

playback

☒ Interpolate between grib ☒ Loop Mode

Slices per Update

Updates per Second

Slices per hour

Display

Sea Temperature Units **Celcius**

☐ Barbed Arrows Option None

☐ Iso Bars Spacing

☐ Direction Arrows Size

☒ OverlayMap Colors **SeaTemp**

☒ Numbers Spacing

OK Avsluta

GRIB Config [X]

playback

☒ Interpolate between grib ☒ Loop Mode

Slices per Update

Updates per Second

Slices per hour

Display

Current Units **Knots**

☐ Barbed Arrows Option None

☐ Iso Bars Spacing


☒ Direction Arrows Size

☒ OverlayMap Colors **Current**

☐ Numbers Spacing

OK Avsluta

Next session with good wave data. 10:00z

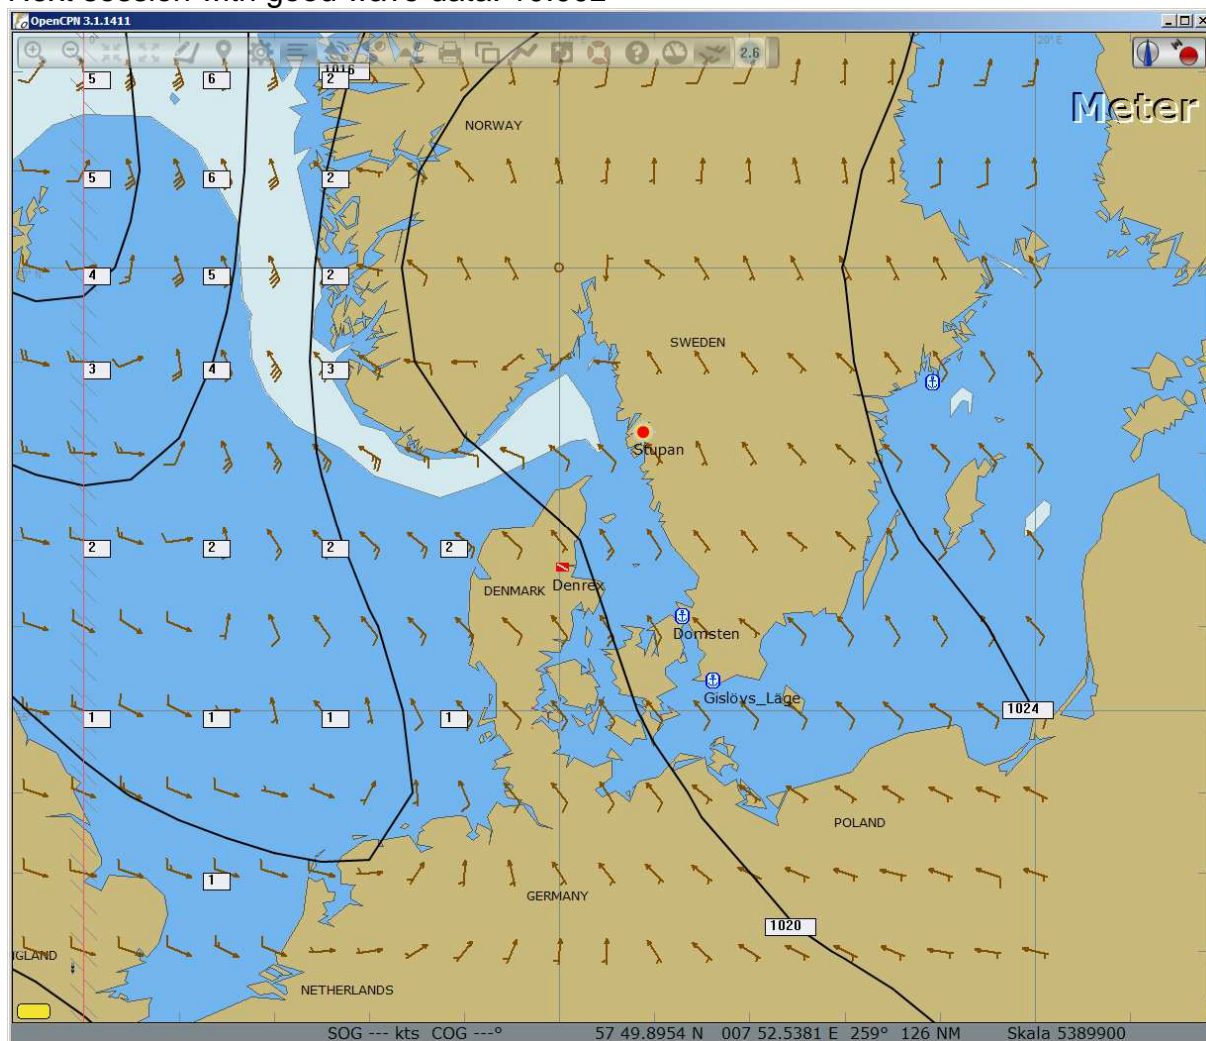

Pointer at the same place as before.

